

DESICCANT DRYAIR 200 VRF



> Lower footprint/weight per m³/hr

> A unique triple point control on all machines over 1500 m³/hr, measuring the regeneration temperature onto the wheel, the wheel off temperature (wet air) and the RH or Dew point of the air being dried. This combination ensures the amount of energy input is relevant to the moisture being extracted. This can be applied to 500 m³/hr units as option extra.

> Numerous options available, pre-heaters and coolers, post heaters and coolers, humidifiers and many other variations as special machines.

> Filters up to F7 as standard with HEPPA & ULPA available.

> Highly efficient Silica Gel Rotor for efficiency & durability, high moisture removal efficiency with the lowest energy costs.

> Various regeneration options available on units above 1500 m³/hr. All options are fully modulating.

APPLICATIONS



✓ DRYING ✓ SILOS ✓ MILITARY STORAGE ✓ ARCHIVE STORAGE ✓ FREEZER STORAGE

SPECIFICATIONS

Process Airflow Nominal	200	m ³ / hr
Process Pre filter	1 x 200 x 200	No / Size / Grade
High Perf Silica Gel Rotor	250 x 50	mm
Desiccant Wheel Rotation Speed	36	RPH
Process Fan Model	DDAS-AA140	
Motor Power	0.176	kW
Moisture Removal		
20°C @ 40% RH	0.8688	kg / hr
20°C @ 60% RH	1.1376	kg / hr
25°C @ 60% RH	1.2264	kg / hr
30°C @ 80% RH	1.3248	kg / hr
Total Pressure / External Pressure	395 / 280	Pa
Regeneration Airflow Nominal	73	m ³ / hr
Regeneration Filter	1 x 140 x 200	No / Size / Grade
Heater Option	Electric PTC	Electric PTC
Heater Power (on startup)	2.7	kW
Heater Power (after initial start)	1.6	kW
Fan Model	DDAS-AA120	
Motor Power	0.058	kW
Total Pressure / External Pressure	285 / 205	Pa
Electrical Supply	1p/N/E	1p/N/E
Voltage	230	V / Ac
Electrical Input Power (on start up)	2.934	kW
ΔPa Process / Regeneration / Pre-purge	32 / 43 / 26	Pa
Dimensions	350 x 390 x 370	L x W x H mm
Process Inlet	300 x 160	mm
Process Outlet	125	mm
Regeneration Inlet	100	mm
Regeneration Outlet	100	mm
Weight	23.5	kg

* pressure readings at dirty filter condition

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

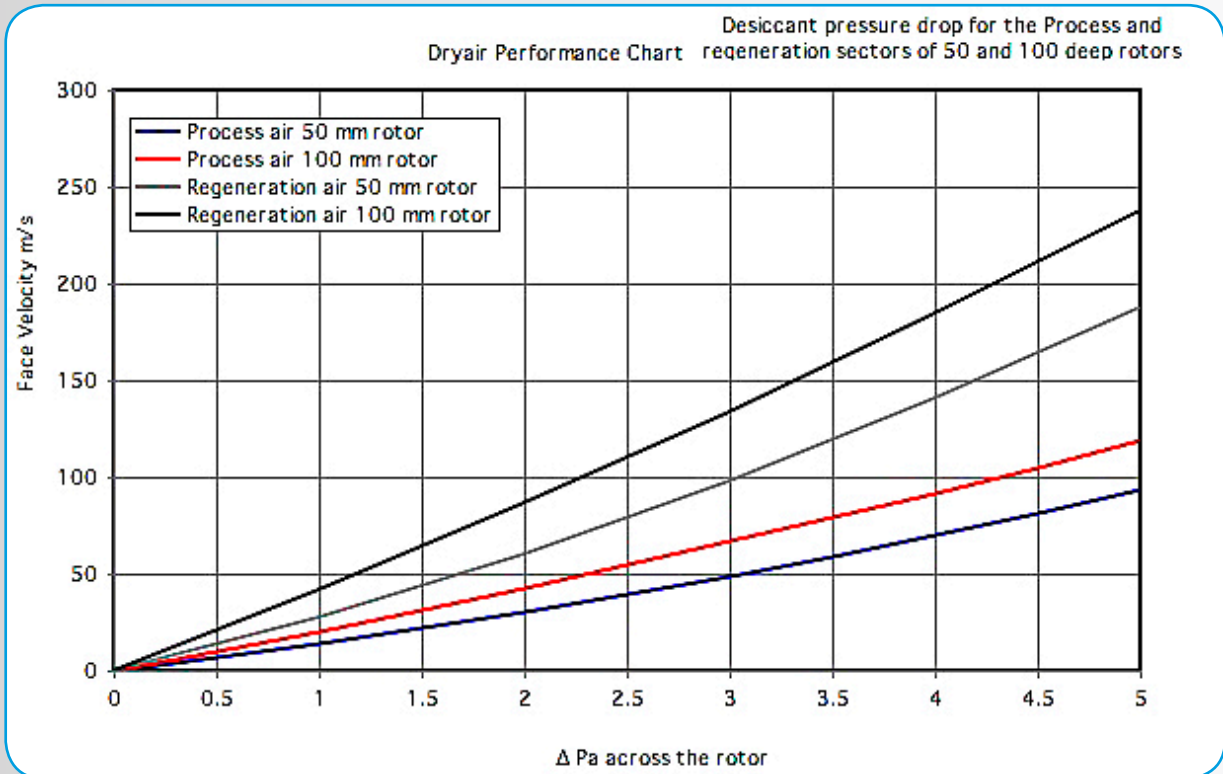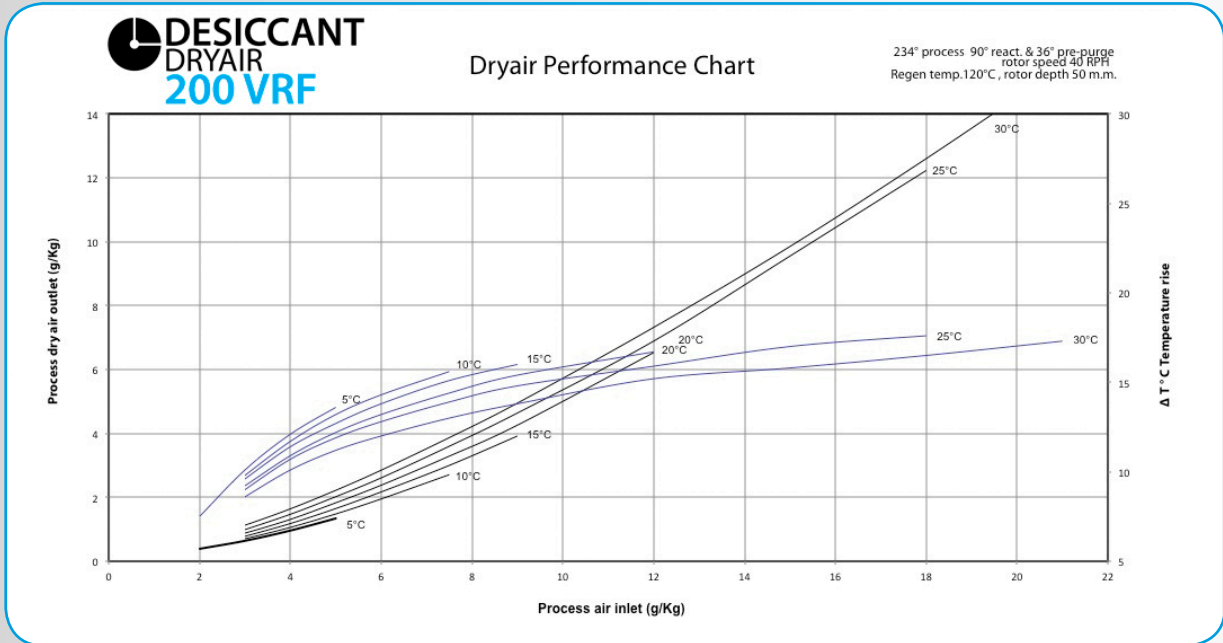

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

