



- ▶ Lower footprint/weight per m³/hr
- ▶ A unique triple point control on all machines over 1500 m³/hr, measuring the regeneration temperature onto the wheel, the wheel off temperature (wet air) and the RH or Dew point of the air being dried. This combination ensures the amount of energy input is relevant to the moisture being extracted. This can be applied to 500 m³/hr units as option extra.
- ▶ Numerous options available, pre-heaters and coolers, post heaters and coolers, humidifiers and many other variations as special machines.
- ▶ Filters up to F7 as standard with HEPPA & ULPA available.
- ▶ Highly efficient Silica Gel Rotor for efficiency & durability, high moisture removal efficiency with the lowest energy costs.
- ▶ Various regeneration options available on units above 1500 m³/hr. All options are fully modulating.

APPLICATIONS

DRYING • SILOS • MILITARY STORAGE • ARCHIVE STORAGE • FREEZER STORAGE •
PHARMACEUTICAL • PACKAGING • POWDER MANUFACTURE • FOOD INDUSTRIES

SPECIFICATIONS

Process Airflow Nominal	1250	m ³ / hr
Process Pre filter	1 x 600 x 400 pleated panel G4	No / Size / Grade
High Perf Silica Gel Rotor	550 x 100	mm
Desiccant Wheel Rotation Speed	14	RPH
Process Fan Model	DD SRER-11-0250	
Motor Power	0.55	kW
Moisture Removal		
20°C @ 40% RH	6.25	kg / hr
20°C @ 60% RH	8.38	kg / hr
25°C @ 60% RH	8.96	kg / hr
30°C @ 80% RH	10.39	kg / hr
Post cooling / 10°C off temp	13.64	kW
Medium	Direct expansion refrigerant	
Refrigerant	R407C	
Compressor	2EES-3Y	
Compressor input power (max)	3.35	kW
COP/EER	3.17	
Condensing capacity	20.98	kW
Expansion valve	Electronic	
Valve control	From onboard PLC	
Hot gas bypass	Yes	
Post heating / 2.0°C - 20.0°C	10.42	kW
Control	PWM SSR	
Post humidification	0.00	kg/Hr
Type	Electric	kg/Hr
Input Power Max	6	kW
Thermal protection	yes	
Water connection	0.5" BSP(T) Female	
Drain connection	0.75" BSP(T) Female	
Regeneration Airflow Nominal	454.00	m ³ / hr
Regeneration Filter	1 x 400 x 300 pleated panel G4	No / Size / Grade
Heater Option	Electric Gas Steam	Electric PTC
Heater Power (on startup)	18.90	kW
Heater Power (after initial start)	11.30	kW
Fan Model	DD SRER-11-0200	
Motor Power	0.37	kW
Total Pressure / External Pressure	876 / 539.5	Pa
Electrical Supply	3p/N/E 50 / 60 Hz	1p/N/E
Voltage	380 415	V / Ac
Electrical Input Power (on start up)	39.59	kW
Amps per phase	60.22	A/Phase **

SPECIFICATIONS

Δ Pa Process / Regeneration / Pre-purge

94 / 118 / 73

Pa

Dimensions

1600 x 800 x 1800

L x W x H mm

Process Inlet

400 x 400

mm

Process Outlet

3

mm

Regeneration Inlet

400 x 400

mm

Regeneration Outlet

2



mm

Weight

1400

kg

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

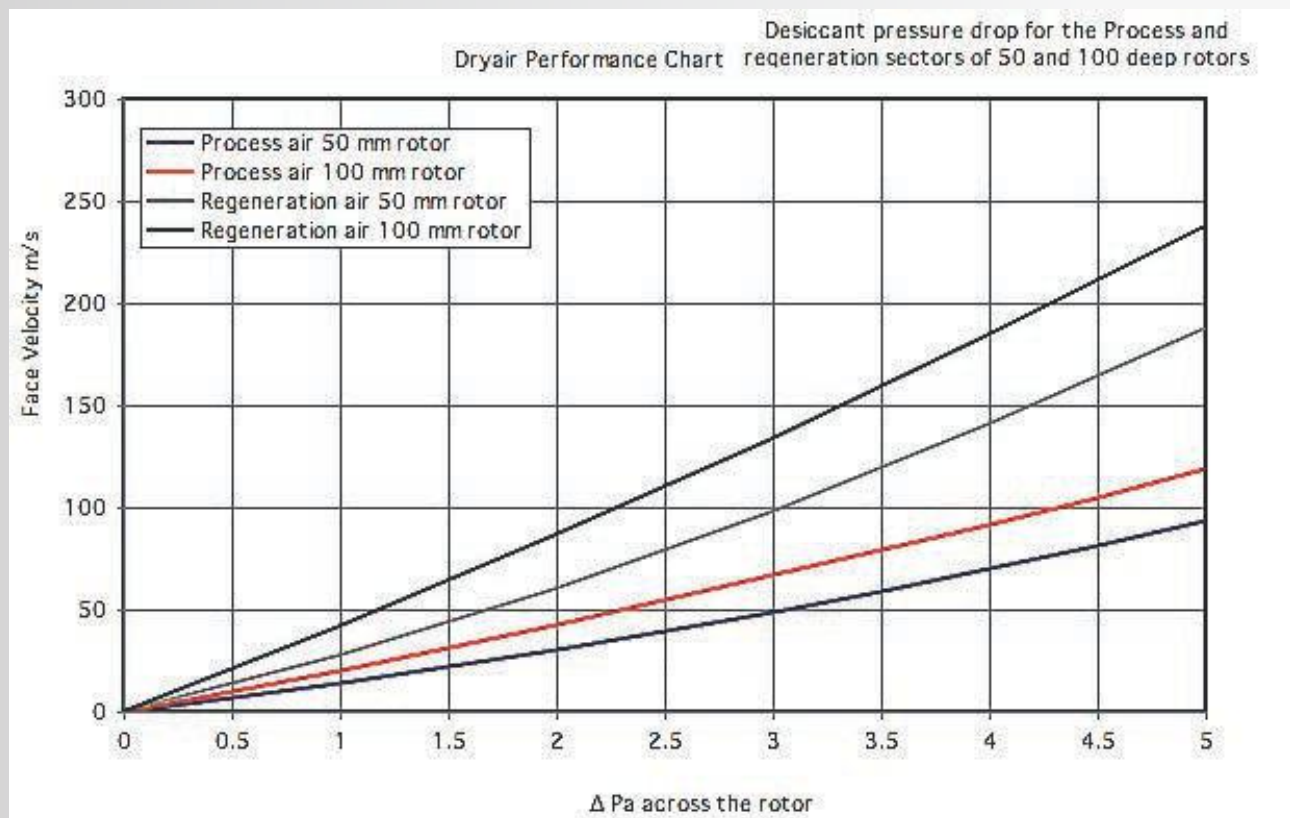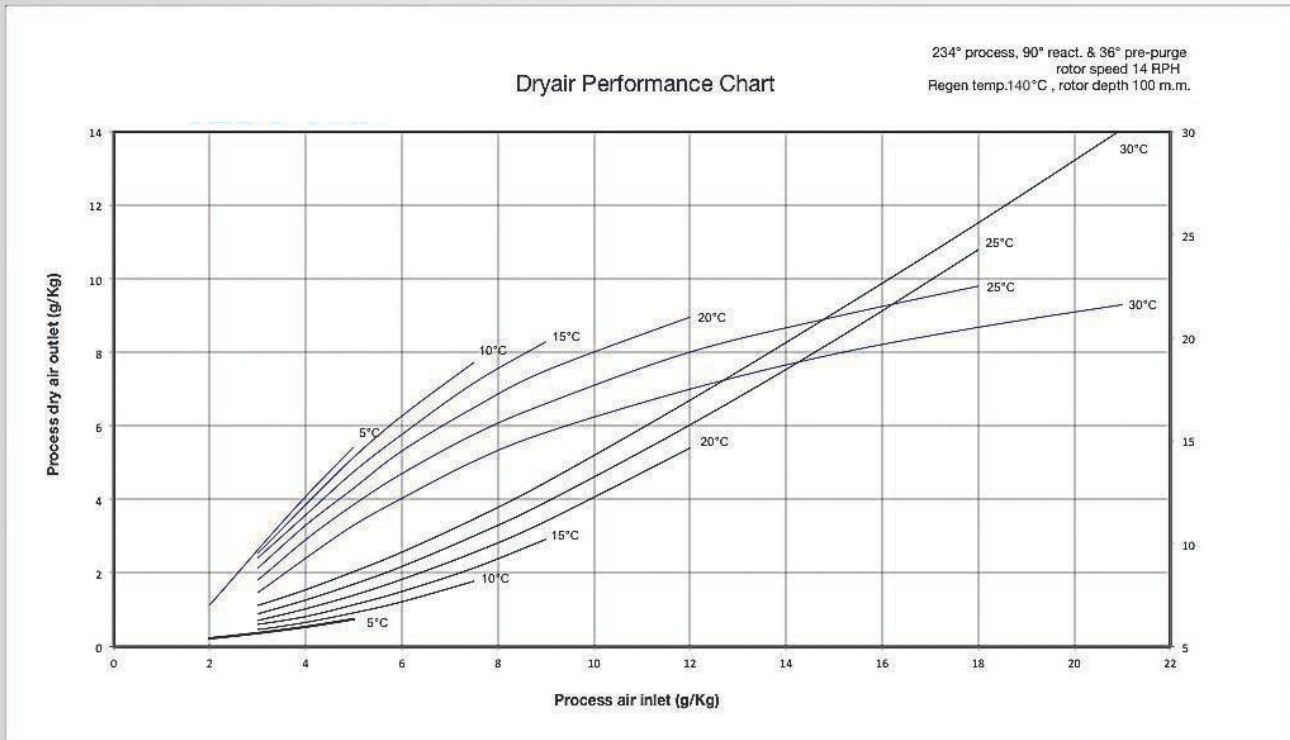

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

