



- Lower footprint/weight per m³/hr
- A unique triple point control on all machines over 1500 m³/hr, measuring the regeneration temperature onto the wheel, the wheel off temperature (wet air) and the RH or Dew point of the air being dried. This combination ensures the amount of energy input is relevant to the moisture being extracted. This can be applied to 500 m³/hr units as option extra.
- Numerous options available, pre-heaters and coolers, post heaters and coolers, humidifiers and many other variations as special machines.
- Filters up to F7 as standard with HEPPA & ULPA available.
- Highly efficient Silica Gel Rotor for efficiency & durability, high moisture removal efficiency with the lowest energy costs.
- Various regeneration options available on units above 1500 m³/hr. All options are fully modulating.

APPLICATIONS

DRYING • SILOS • MILITARY STORAGE • ARCHIVE STORAGE • FREEZER STORAGE

SPECIFICATIONS

Process Airflow Nominal	150	m ³ / hr
Process Pre filter	1 x 160 x 175 Synthetic media	No / Size / Grade
High Perf Silica Gel Rotor	250 x 50	mm
Desiccant Wheel Rotation Speed	36	RPH
Process Fan Model	DDAS-AA140	
Motor Power	0.18	kW
Moisture Removal		
20°C @ 40% RH	0.70	kg / hr
20°C @ 60% RH	0.92	kg / hr
25°C @ 60% RH	1.00	kg / hr
30°C @ 80% RH	1.11	kg / hr
Post cooling / 10°C off temp	1.93	kW
Medium	Direct expansion refrigerant	
Refrigerant	R134a	
Compressor	G26MFX	
Compressor input power (max)	0.86	kW
COP/EER	2.30	
Condensing capacity	2.41	kW
Expansion valve	Electronic	
Valve control	From onboard PLC	
Hot gas bypass	Yes	
Post heating / 2.0°C - 20.0°C	1.50	kW
Control	PWM SSR	
Post humidification	0.00	kg/Hr
Type	Electric	kg/Hr
Input Power Max	3	kW
Thermal protection	yes	
Water connection	0.5" BSP(T) Female	
Drain connection	0.75" BSP(T) Female	
Regeneration Airflow Nominal	54.00	m ³ / hr
Regeneration Filter	1 x 115 x 175 Synthetic media	No / Size / Grade
Heater Option	Electric PTC	Electric PTC
Heater Power (on startup)	2.00	kW
Heater Power (after initial start)	1.20	kW
Fan Model	DDAS-AA108	
Motor Power	0.04	kW
Total Pressure / External Pressure	200 / 140	Pa
Electrical Supply	1p/N/E 50 / 60 Hz	1p/N/E
Voltage	220 230	V / Ac
Electrical Input Power (on start up)	7.57	kW
Amps per phase	19.90	A/Phase **

SPECIFICATIONS

Δ Pa Process / Regeneration / Pre-purge

14 / 20 / 16

Pa

Dimensions

900 x 470 x 1050

L x W x H mm

Process Inlet

80

mm

Process Outlet

75

mm

Regeneration Inlet

80

mm

Regeneration Outlet

50

mm



Weight

55

kg

PERFORMANCE

TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

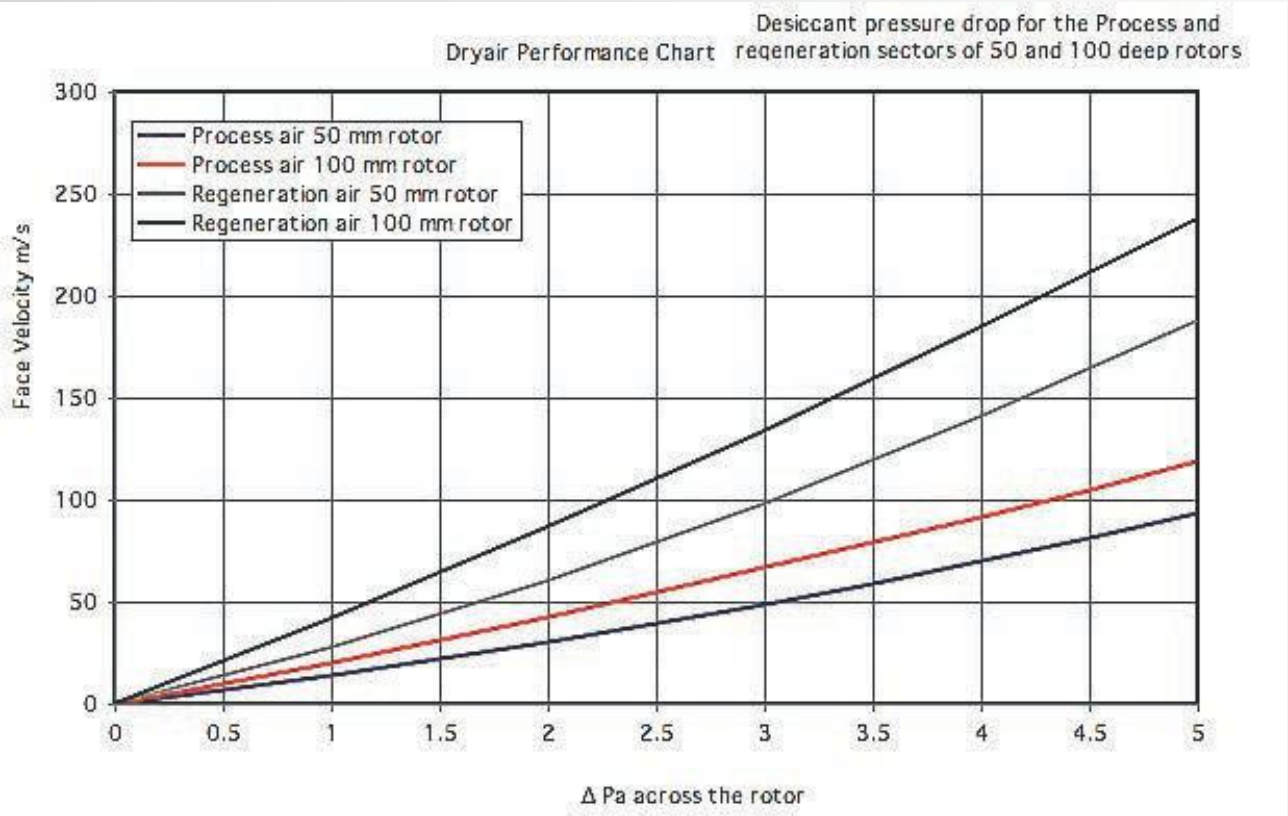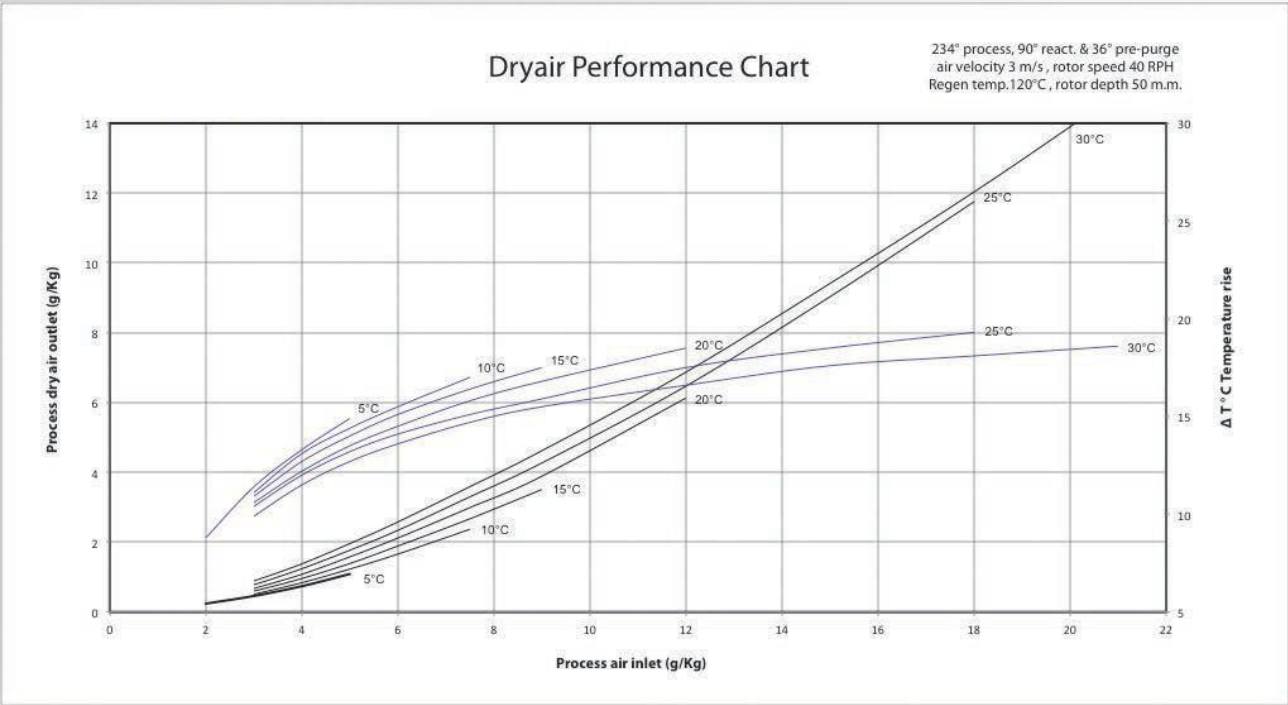

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

