




- 
- ▶ Lower footprint/weight per m³/hr
 - ▶ A unique triple point control on all machines over 1500 m³/hr, measuring the regeneration temperature onto the wheel, the wheel off temperature (wet air) and the RH or Dew point of the air being dried. This combination ensures the amount of energy input is relevant to the moisture being extracted. This can be applied to 500 m³/hr units as option extra.
 - ▶ Numerous options available, pre-heaters and coolers, post heaters and coolers, humidifiers and many other variations as special machines.
 - ▶ Filters up to F7 as standard with HEPPA & ULPA available.
 - ▶ Highly efficient Silica Gel Rotor for efficiency & durability, high moisture removal efficiency with the lowest energy costs.
 - ▶ Various regeneration options available on units above 1500 m³/hr. All options are fully modulating.

APPLICATIONS

DRYING • SILOS • MILITARY STORAGE • ARCHIVE STORAGE • FREEZER STORAGE •
PHARMACEUTICAL • PACKAGING • POWDER MANUFACTURE • FOOD INDUSTRIES



SPECIFICATIONS

Process Airflow Nominal	2000	m ³ / hr
Process Pre filter	1 x 600 x 600 pleated panel G4	No / Size / Grade
High Perf Silica Gel Rotor	700 x 200	mm
Desiccant Wheel Rotation Speed	9	RPH
Process Fan Model	DD SRER-11-0315	
Motor Power	1.10	kW
Moisture Removal		
20°C @ 40% RH	12.31	kg / hr
20°C @ 60% RH	16.92	kg / hr
25°C @ 60% RH	18.62	kg / hr
30°C @ 80% RH	21.31	kg / hr
Post cooling / 10°C off temp	24.74	kW
Medium	Direct expansion refrigerant	
Refrigerant	R407C	
Compressor	4FES-5Y-40S	
Compressor input power (max)	5.10	kW
COP/EER	3.23	
Condensing capacity	32.40	kW
Expansion valve	Electronic	
Valve control	From onboard PLC	
Hot gas bypass	Yes	
Post heating / 2.0°C - 20.0°C	16.67	kW
Control	0 - 10 Vdc Thyristor	
Post humidification	0.00	kg/Hr
Type	Electric Thyristor control	kg/Hr
Input Power Max	6	kW
Thermal protection	yes	
Water connection	0.5" BSP(T) Female	
Drain connection	0.75" BSP(T) Female	
Regeneration Airflow Nominal	726.00	m ³ / hr
Regeneration Filter	1 x 500 x 400 Pleated panel G4	No / Size / Grade
Heater Option	Electric Gas Steam	Electric PTC
Heater Power (on startup)	30.30	kW
Heater Power (after initial start)	18.20	kW
Fan Model	DD SRER-11-0200	
Motor Power	0.37	kW
Total Pressure / External Pressure	874 / 334.5	Pa
Electrical Supply	3p/N/E 50 / 60 Hz	1p/N/E
Voltage	380 415	V / Ac
Electrical Input Power (on start up)	59.54	kW
Amps per phase	90.56	A/Phase **

SPECIFICATIONS

Δ Pa Process / Regeneration / Pre-purge	187 / 234 / 128	Pa
Dimensions	2000 x 900 x 2000	L x W x H mm
Process Inlet	500 x 500	mm
Process Outlet	3	mm
Regeneration Inlet	500 x 400	mm
Regeneration Outlet	2	mm
Weight	1700	kg

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

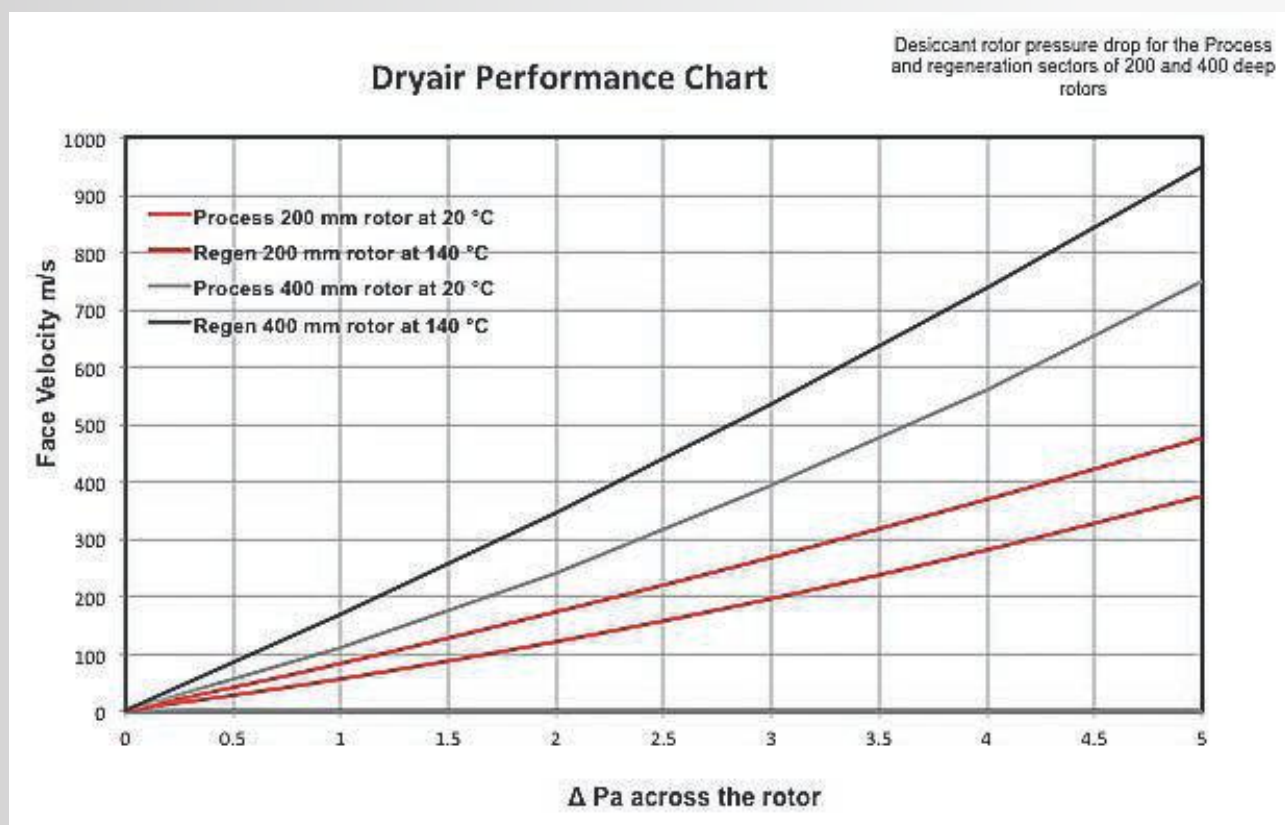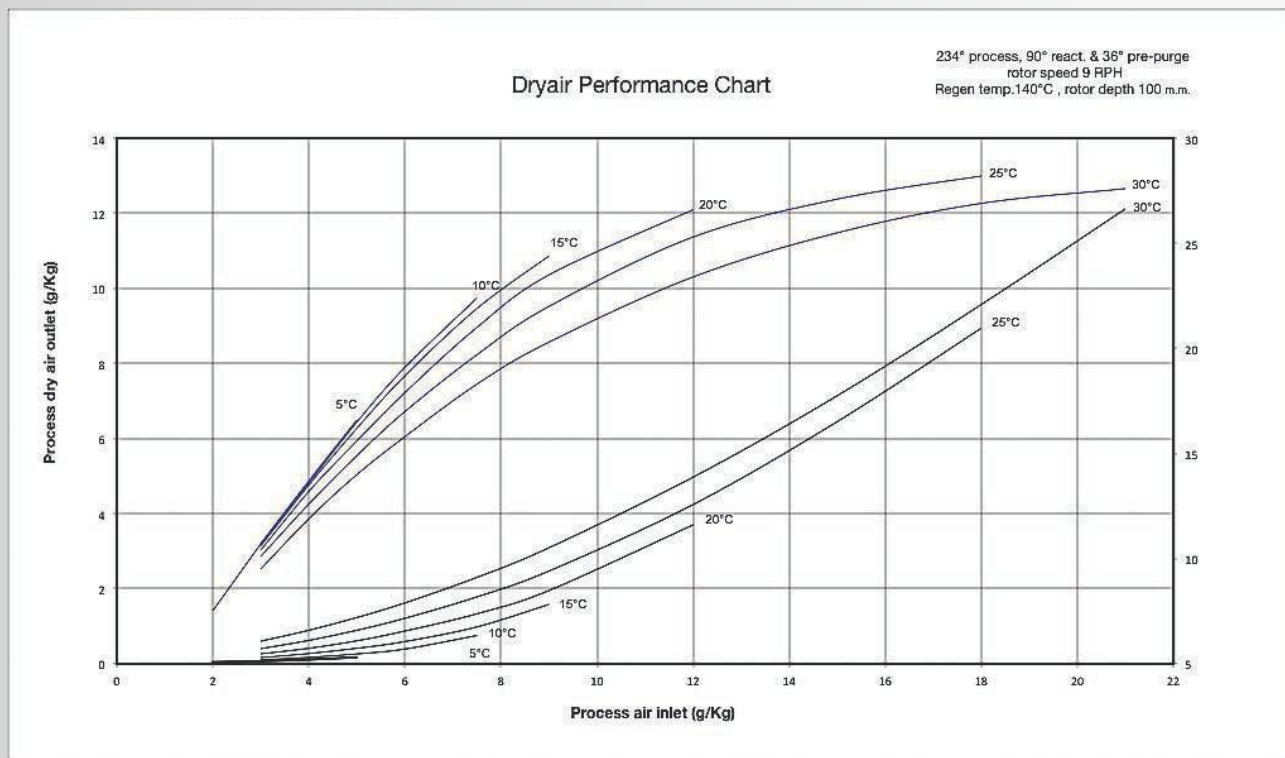

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

