

DESICCANT DRYAIR 1000 VRF



- > Lower footprint/weight per m³/hr
- > A unique triple point control on all machines over 1500 m³/hr, measuring the regeneration temperature onto the wheel, the wheel off temperature (wet air) and the RH or Dew point of the air being dried. This combination ensures the amount of energy input is relevant to the moisture being extracted. This can be applied to 500 m³/hr units as option extra.
- > Numerous options available, pre-heaters and coolers, post heaters and coolers, humidifiers and many other variations as special machines.
- > Filters up to F7 as standard with HEPPA & ULPA available.
- > Highly efficient Silica Gel Rotor for efficiency & durability, high moisture removal efficiency with the lowest energy costs.
- > Various regeneration options available on units above 1500 m³/hr. All options are fully modulating.

APPLICATIONS



- | | | |
|-------------------|--------------------|----------------------|
| → SILOS | → FOOD INDUSTRIES | → PHARMACEUTICAL |
| → TIMBER DRYING | → MILITARY STORAGE | → PACKAGING |
| → ARCHIVE STORAGE | → FREEZER STORAGE | → POWDER MANUFACTURE |

SPECIFICATIONS

Process Airflow Nominal	1000	m ³ / hr
Process Pre filter	1 x 400 x 300 pleated panel G4	No / Size / Grade
High Perf Silica Gel Rotor	450 x 100	mm
Desiccant Wheel Rotation Speed	17	RPH
Process Fan Model	DD SRER-11-0250	
Motor Power	0.37	kW
Moisture Removal		
20°C @ 40% RH	4.812	kg / hr
20°C @ 60% RH	6.456	kg / hr
25°C @ 60% RH	6.924	kg / hr
30°C @ 80% RH	7.932	kg / hr
Total Pressure / External Pressure	631 / 387	Pa
Regeneration Airflow Nominal	363	m ³ / hr
Regeneration Filter	1 x 400 x 300 pleated panel G4	No / Size / Grade
Heater Option	Electric Thyristor control	Electric PTC
Heater Power (on startup)	15.1	kW
Heater Power (after initial start)	9.1	kW
Heater option	Electric Gas Steam	***
Fan Model	DDAS-AA160	
Motor Power	0.176	kW
Total Pressure / External Pressure	435 / 89	Pa
Electrical Supply	3p/N/E 50 / 60 Hz	1p/N/E
Voltage	380 415	V / Ac
Electrical Input Power (on start up)	15.646	kW
Amps per phase	23.8 21.79 -----	A/Phase **
ΔPa Process / Regeneration / Pre-purge	112 / 144 / 87	Pa
Dimensions	900 x 640 x 710	L x W x H mm
Process Inlet	225	mm
Proces Outlet	225	mm
Regeneration Inlet	150	mm
Regeneration Outlet	150	mm
Weight	131	kg


* pressure readings at dirty filter condition

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

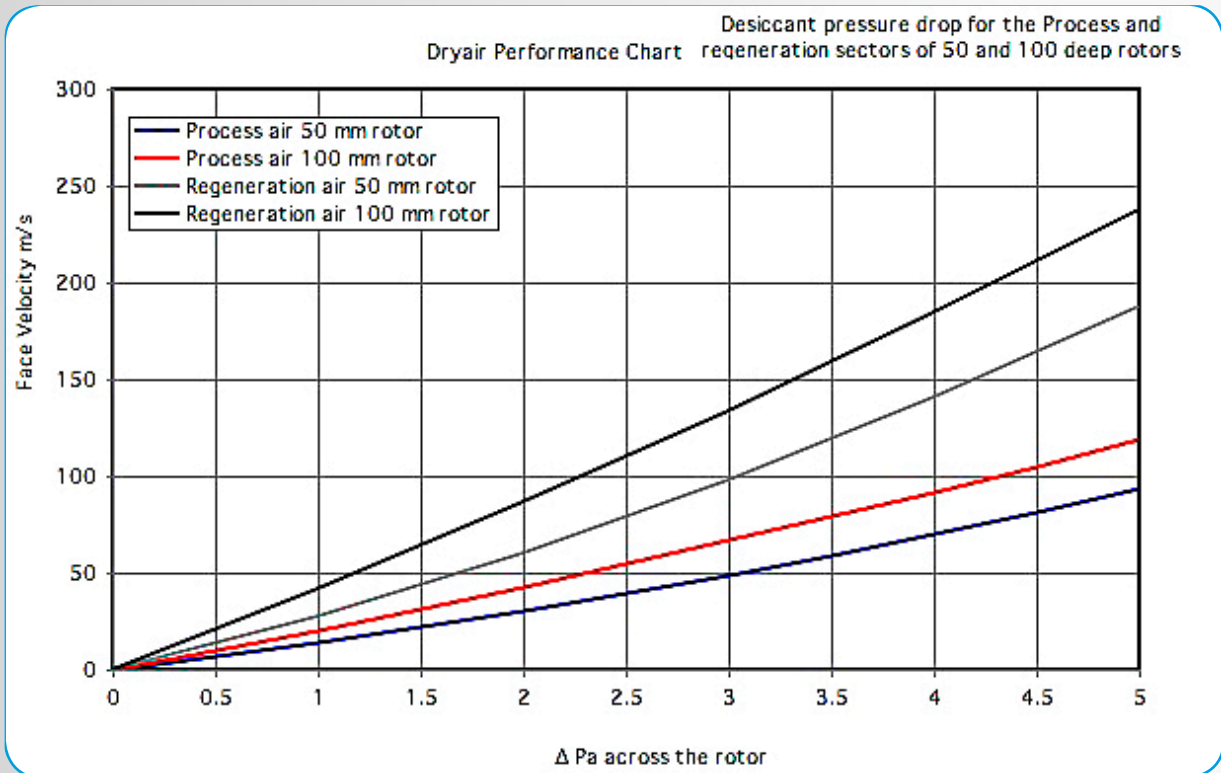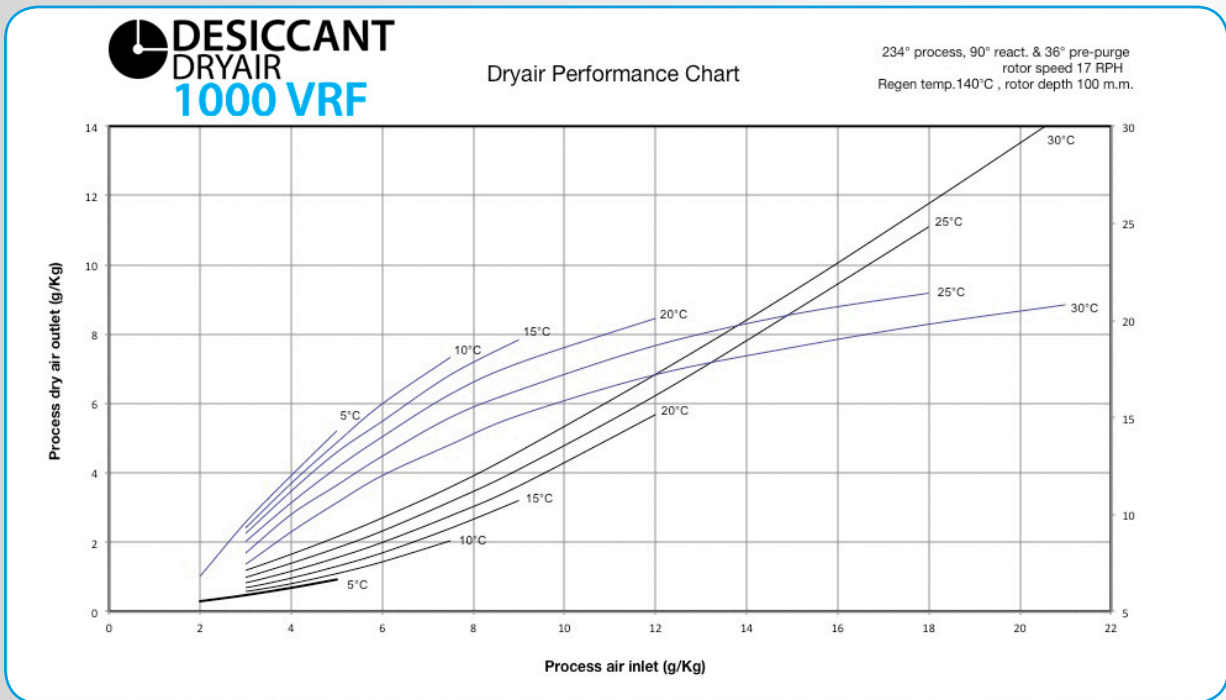

PERFORMANCE TECHNICAL DRAWINGS AVAILABLE UPON REQUEST

Process Fan Curve for the 1000 VRF

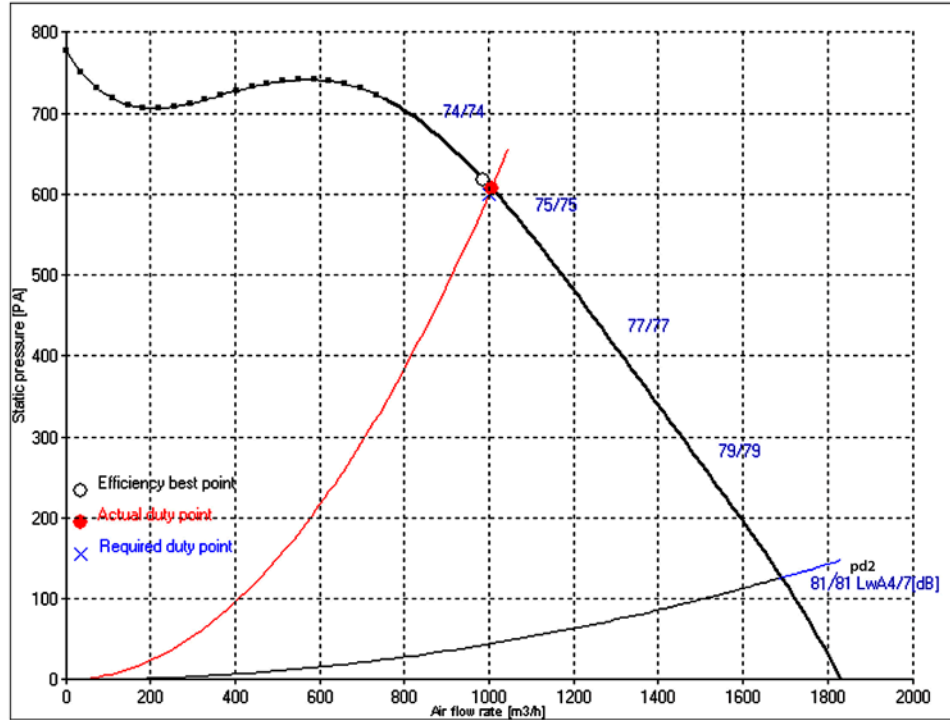

Regeneration Fan Curve for the 1000 VRF

